
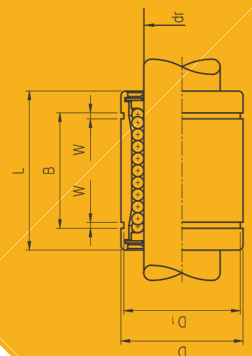


LM

بال بوشینگ های چینی آسیای جنوب شرقی

بلبرینگ عالی



www.1abc.ir

۰۲۱-۳۳۹۷۱۸۴۵



LM

بال بوشینگ های چینی استاندارد آسیای جنوب شرقی

Nominal Shaft dia. mm	Resin Retainer			mm	dr	
	Standard type LM...UU	Ball Circuit	Weight (gf)		Tolerance μm	
					Precision	High
3	LM 3	4	1.35	3	0-5	0-8
4	LM 4	4	1.9	4		
5	LM 5 UU	4	4	5		
6	LM 6 UU	4	7.6	6		
8	LM 8 SUU	4	10.4	8		
8	LM 8 UU	4	15	8	0-6	0-9
10	LM 10 UU	4	29.5	10		
12	LM 12 UU	4	31.5	12		
13	LM 13 UU	4	43	13		
16	LM 16 UU	5	69	16		
20	LM 20 UU	5	87	20	0-7	0-10
25	LM 25 UU	6	220	25		
30	LM 30 UU	6	250	30		
35	LM 35 UU	6	390	35		
40	LM 40 UU	6	585	40	0-8	0-12
50	LM 50 UU	6	1,580	50		
60	LM 60 UU	6	1,860	60	0-9	0-15
80	LM 80 UU	6	4,420	80		
100	LM 100 UU	6	8,600	100	0-10	0-20
120	LM 120 UU	8	15,000	120		
150	LM 150 UU	8	20,250	150	0-13	0-25

Major dimensions and tolerance(T)											Eccentricity μm		Radial clearance (max) μm	Basic load rating		
mm	D T μm	mm	L T μm	mm	B T μm	W mm	D1 mm	h mm	h_1 mm	Θ	Precision	High		Dynamic C N	Static Co N	
7		10		-	-	-	-	-	-	-	4	8	-3	69	105	
8	0-9	12	0-120	-	-	-	-	-	-	-				68	127	
10		15		10.2		1.1	9.6	-	-	-	-	-		167	206	
12		19		13.5		1.1	12	-	-	-	8	12	206	265		
15	0-11	17		11.5		1.1	14	1	-	-					176	216
15		24		17.5		1.1	14	1	-	-					274	392
19		29	0-200	22	0-200	1.3	18	1	7	80°	10	15	372	549		
21		30		23		1.3	20	2	8	80°					510	784
23	0-13	32		23		1.3	22	2	9	80°					510	784
28		37		26.5		1.6	27	2	11	80°	12	20	774	1,180		
32		42		30.5		1.6	31	2	11	60°					882	1,370
40	0-16	59		41		1.9	38	2	12	50°					980	1,570
45		64		44.5		1.9	43	3	15	50°	17	25	1,570	2,740		
52		70	0-300	49.5	0-300	2.1	49	3	17	50°					1,670	3,140
62	0-19	80		60.5		2.1	57	3	20	50°					2,160	4,020
80		100		74		2.6	77	3	25	50°	20	30	3,820	7,940		
90		110		85		3.2	87	3	30	50°					4,700	10,000
120	0-22	140		106		4.2	116	3	40	50°					7,350	16,000
150		175	0-400	126	0-400	4.2	145	3	50	50°	25	40	14,100	34,800		
180	0-25	200		159		4.2	175	3	85	80°					16,400	40,000
210	0-29	240		171		5.2	204	3	-	80°					21,100	54,300