


LME

بال بوشینگ های چینی استاندارد اروپا



بلبرینگ عالی

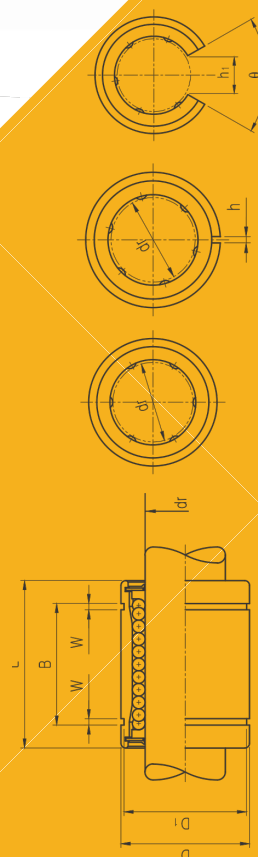

www.1abc.ir

۰۲۱-۳۳۹۷۱۸۴۵



LME

بال بوشینگ های چینی استاندارد اروپا

Nominal Shaft dia. mm	Resin Retainer			mm	dr	
	Standard type LME...UU	Ball Circuit	Weight (gf)		Tolerance μm	
					Precision	High
3	LME 3 UU	4	1.35	3	-	+8-0
4	LME 4 UU	4	1.9	4		
5	LME 5 UU	4	11	5		
8	LME 8 UU	4	20	8		
10	LME 10 UU	4	29.5	10		
12	LME 12 UU	4	41	12		
16	LME 16 UU	5	57	16	-	+9-1
20	LME 20 UU	5	91	20		
25	LME 25 UU	6	215	25	-	+11-1
30	LME 30 UU	6	325	30		
40	LME 40 UU	6	705	40	-	+13-2
50	LME 50 UU	6	1,130	50		
60	LME 60 UU	6	2,000	60		

Major dimensions and tolerance(T)											Eccentricity μm	Radial clearance (max) μm	Basic load rating		
mm	D		L	mm	B		W mm	D1 mm	h mm	h ₁ mm			Θ	Dynamic C N	Static Co N
	T μm	mm			T μm	T μm									
7	0-8	10	0-120	-	-	-	-	-	-	-	10	-3	69	105	
8		12		-	-	-	-	-	-	-			88	127	
12	0-9	22	0-200	14.5	0-200	1.1	11.5	1	-	-	12	-4	206	265	
16		25		16.5		1.1	15.2	1	-	-			265	402	
19		29		22		1.3	18	1	6.8	80°			372	549	
22	0-11	32	0-300	22.9	0-300	1.3	21	1.5	7.5	78°	15	-6	510	784	
26		36		24.9		1.3	24.9	1.5	10	78°			578	892	
32	0-13	45	0-400	31.5	0-400	1.6	30.3	2	10	60°	17	-8	862	1370	
40		58		44.1		1.85	37.5	2	12.5	60°			980	1570	
47		68		52.1		1.85	44.5	2	12.5	50°			1570	2,740	
62	0-15	80	0-400	60.6	0-400	2.15	59	3	16.8	50°	20	-13	2160	4,020	
75		100		77.6		2.65	72	3	21	50°			3820	7,940	
90	0-15	125	0-400	101.7	0-400	3.15	86.5	3	27.2	54°	20	-13	4,700	9,800	