



NAST

غلٹک شیار - نوع یوغی

بلبرینگ عالی



NAST

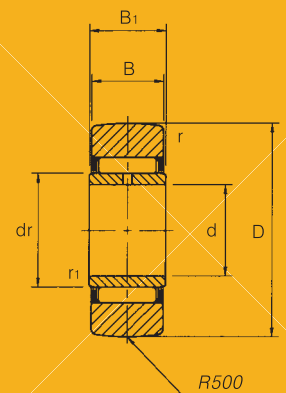

NAST..R



www.1abc.ir

۰۲۱-۳۳۹۷۱۸۴۵



(Bore diameter) mm d	(Bearing No.)		(Dimensions) mm						(Weight) gr.	(Basic dynamic load ratings) C Kgf	(Basic static load ratings) Co Kgf	(Track capacity) Kgf	(Limiting speed) rpm
	(Cylindrical outer ring)	(Crowned outer ring)	D	B ₁	B	r	r ₁	dr					
6	NAST 6	NAST 6R	19	10	9.8	0.5	0.5	10	17.8	370	290	320/120	20,000
8	NAST 8	NAST 8R	24	10	9.8	1	0.5	12	28	510	380	360/160	17,000
10	NAST 10	NAST 10R	30	12	11.8	1.5	0.5	14	50	880	640	510/210	15,000
12	NAST 12	NAST 12R	32	12	11.8	1.5	0.5	16	58	940	710	540/240	13,000
15	NAST 15	NAST 15R	35	12	11.8	1.5	0.5	20	62	1,110	920	600/270	10,000
17	NAST 17	NAST 17R	40	16	15.8	1.5	0.5	22	110	1,580	1,340	990/320	9,500
20	NAST 20	NAST 20R	47	16	15.8	1.5	0.5	25	155	1,740	1,560	1,160/390	8,500
25	NAST 25	NAST 25R	52	16	15.8	1.5	0.5	30	180	1,870	1,790	1,290/450	7,000
30	NAST 30	NAST 30R	62	20	19.8	1.5	1	38	320	2,740	2,850	2,020/570	5,500
35	NAST 35	NAST 35R	72	20	19.8	1.5	1	42	440	2,910	3,170	2,340/700	5,000
40	NAST 40	NAST 40R	80	20	19.8	2	1.5	50	530	3,220	3,800	2,450/800	4,000
45	NAST 45	NAST 45R	85	20	19.8	2	1.5	55	580	3,360	4,110	2,600/870	4,000
50	NAST 50	NAST 50R	90	20	19.8	2	1.5	60	635	3,500	4,430	2,750/940	3,500